


Śruby dwustronne, długość części wkręcanej 2d

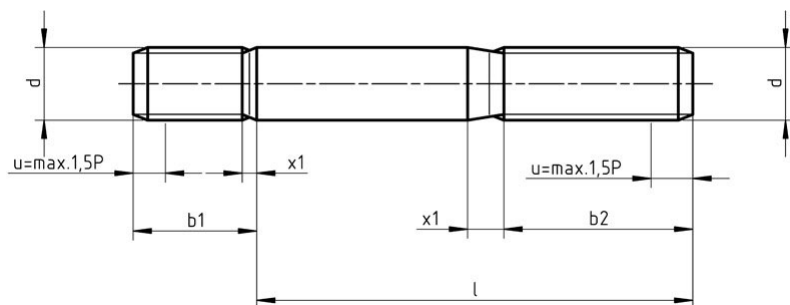

- **Normy:**
 - DIN 835
 - PN 82137
 - ISO -
- **Material i klasa:**
 - 5,8 / 8,8 / A2 / A4
- **Pokrycie:**
 - cynk galwaniczny
 - cynk termodyfuzyjny

d	M5	M6	M8 M8x1	M10 M10x1 ,25	M12 M12x1 ,25 M12x1 ,5	(M14) (M14x 1,5)	M16 M16x 1,5	(M18) (M18x 1,5)	M20 M20x1 ,5	(M22) (M22x 1,5)	M24 M24x2
x1	2,0	2,5	3,2	3,8	4,3	5,0	5,0	6,3	6,3	6,3	7,5
b ₁	10	12	16	20	24	28	32	36	40	44	48
b ≤ 125	16	18	22	26	30	34	38	42	46	50	54
b 125 < l ≤ 200	22	24	28	32	36	40	44	48	52	56	60
b > 200	-	-	-	45	49	53	57	61	65	69	73

() - wymiary nie zalecane